



## 36 CH Full-HD Network Video Recorder

### NVR6036LX-RAID



- ▶ Linux-based standalone NVR
- ▶ Manage up to 36 IP cameras
- ▶ Supports 5 Mega-pixel IP cameras
- ▶ Up to 1080FPS, each channel@30FPS
- ▶ Manual / schedule / event recording
- ▶ Various types of event alerts
- ▶ Support time-point backup function under Ethernet remote control mode
- ▶ eSATA connector connects to external storage for expansion
- ▶ Remote client access and management
- ▶ Free App (wecam\_p2p) for monitoring via Android / iOS smart phone

#### Specification

##### System

CPU / OS	ARM Cortex 9 / Embedded Linux
Network	Dual Gigabit Ethernet ports
Video Output	VGA x 1, HDMI x 1, up to 1920x1080
USB Connector	USB 2.0 x 2 ( for mouse or USB storage)
eSATA Connector	eSATA x 1 ( for external eSATA storage)
Audio Input	3.5mm jack to connect microphone
Audio Output	3.5mm jack to connect amplified speaker
Digital I/O	Digital Input x 8, Relay Output x 1
RS-485	2- pin terminal Block
Record Storage	Internal Storage: RAID Controller 1: SATA HDD x 4 RAID Controller 2: SATA HDD x 5 Mode: None-RAID, up to 54TB total RAID-1, up to 24TB total RAID-5, up to 42TB total External Storage: eSATA HDD x1, USB Backup Disk
Network Protocol	HTTP, TCP/IP, RTP/RTSP, 3GPP, SMTP, FTP, PPPoE, DHCP (Server & Client), DDNS, NTP, UPnP
Mouse Control	Yes
Authority Control	Password protection
System Monitor	Watchdog
Power Supply	DC 12V, 10A
Dimensions	W430 x H88 x D422 mm
Operating Temp.	0~45°C / 32~113°F
Humidity	0~80% RH (non-condensing)

##### Live View

Split Screen	1, 4, 9, 16,25, 36 ,Full screen
Event Notification	On screen icon / buzzer notification
PTZ Control	Yes ,(CAM6_series preferred)
Digital Zoom	Yes
Privacy Mask	Yes
Channel Identify	Yes, Max. 20 characters for channel name

##### Playback and Backup

Search Method	Date / Time / Event, select from calendar
Log Search	Select video from Log table
Backup	Backup to USB storage

##### Event System

Event Trigger	Motion / Digital Input / Video Loss / Power
Trigger Actions	Recording / E-Mail / FTP / Buzzer Warning

##### Remote Client Access

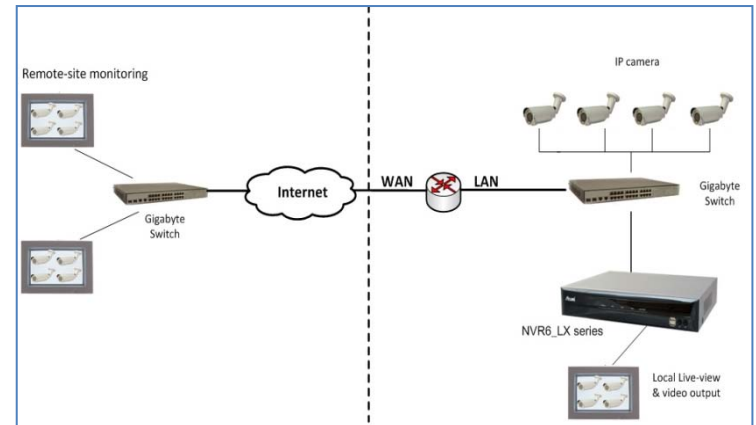
Client Software	Windows PC: IE V7.0 (32-bit) or above Android / iOS smart phone: "iCAM Smart"
Connected Clients	Up to 4 clients simultaneously
Remote Operation	Live view / Playback / Setup / Backup
PC Requirement	OS: Windows 7, Vista, XP Suggested Hardware: Intel Core 2 Duo 2.53GHz, RAM: 1GB

**Video / Audio**

Channel	Max. 36 channels recording and display
Support IPCam	Up to 5 Mega-pixel 2592x1944 H.264, MJPEG compression mode
Frame Rate	Up to 30FPS per channel
Throughput	Up to 100Mbps
2-Way Audio	Hearing voice from IP camera Chatting or broadcasting to IP cameras

**Recording**

Record Format	H.264 video stream
Record Resolution	Depends on IP camera Up to 5 Mega-pixel 2592x1944
Record FPS	Depends on IP camera, up to 30FPS
Record Mode	Manual / Schedule / Event
Pre Recording	5~30 sec
HDD Management	Overwrite when HDD is full Auto delete after selected days

**Connection Diagram**

Preliminary