



2MP_10X_H.265 Network Camera

CAM6040FIRS-PoE



Specification

- ▶ 2Mega-Pixel Sony Exmor-R Starvis Sensor
- ▶ Smart Stream
- ▶ True Wide Dynamic Range
- ▶ Quadruple Streaming
- ▶ H.265 /H.264/MJPEG Compression
- ▶ IR-Cut Filter, IR LED 100M
- ▶ ROI Function
- ▶ 360° Continuous Pan and 90° Tilt
- ▶ Free 36CH recording software & App (wecam_p2p II)

Hardware

CPU	Multimedia SoC
RAM / Flash ROM	256MB /32MB
Image Sensor	1/2.8" Sony Exmor-R Starvis Sensor
Lens	5-50mm, @F1.6~F1.8, 10X optical zoom
View Angle	3.6°~53°(H), 1.9°~30°(V)
Pan/Tilt Range	Pan:360°,Tilt:90° Auto Flip
Manual Control Speed	Pan:0.45°~90°/s ,Tilt:0.35°~45°/s
Sensitivity	Color: 0.005 lux (AGC ON) B/W: 0.001 lux (AGC ON)
Preset(Patrol) Speed	Pan: 240°/s
Preset Accuracy	< ±0.15°
Preset Points	Total 256
Preset Focus Mode	Auto / Manual
Patrol(travel-points)	8 groups with 24 point
Auto Recovery (return back)	Pending Time, Action
Auto Pan	Yes
Cruise	8 groups
Home Position	Yes
Point To Go	Yes
Auto Electronic Shutter	Auto , 1/1 ~ 1/10000
Day & Night Mode	Auto ,Color ,B/W ,Time Mode with auto ICR
Day & Night Level	1~5
Day & Night Delay	5~15sec
2D/3D DNR Mode	0~9
WDR Mode	0~8
Video Orientation	Off ,Flip ,Mirror ,Rotate
White Balance	Auto ,Tungsten Lamp ,Fluorescent Lamp ,Sunlight ,Cloudy ,Cloudy Days
R-Gain /B-Gain	-5~5
Sharpness	-4~4
Anei fog /OSD	Off ,On
Contrast / Saturation	-4 ~ 4
Digital In / Out	1 Digital in
Power Supply	Use PoE: PoE Injector (15W)
Consumption	use Power Adaptor: DC 12V(14.5W)
Operating Temp	-20°C ~ +60°C
LEDs	6 Units HIGH Power
IR Distance	100M
Dimensions	Φ135 x H198 mm (No Bracket)
Weight	1800g

Event System

Event Trigger	Motion Detection, Digital In
Trigger Actions	Send Email, Send to FTP, Save to Samba HDD, Google driver, Dropbox
Motion Area	Windows areas
Pre / Post Alarm	Yes, configurable time

System

Video Resolution	1920x1080, 1280x720, 640x480, 320x240
Video Format	H.265 / H.264 / MJPEG
Frame Rate	Up to 30 FPS
Quadruple Streaming	3 for PC live view, 1 for mobile live view
Bitrate Adjust	CBR / VBR
ROI	Region Of Interest
Video Adjustment	Auto Electronic Shutter, Day/Night Mode, Day/Night Level, Day/Night Delay, DNR Mode , WDR, Video Orientation, White Balance, Sharpness, Contrast, Saturation
True WDR	YES, 120dB
Privacy Mask	3 definable areas
Security	Password protection, IP address filtering, HTTPS encrypted data transmission, IEEE 802.1x port-based authentication for network protection, QoS/DSCP
Firmware Upgrade	HTTP mode, can be upgraded remotely

Network


Ethernet	10 / 100 Base-T
Network Protocol	IPv4/IPv6, HTTP, HTTPS, SNMP, SSL, TLS, DNS, ICMP, IGMP, ARP, SNTp, QoS/DSCP, IEEE 802.1X, RTSP/RTP/RTCP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, Samba, Bonjour
P2P Link	Optional

Remote Client Access

Client Software	Microsoft IE 11 or above Safari V5.1 or above Android => "wecam_p2p II" iOS=> "wecam_p2p II"
Connected Clients	Up to 10 clients simultaneously
PC Requirement	OS: Windows 7,8,10,XP OR above Suggested Hardware: Intel Core 2 Duo 2.8GHz, RAM: 4GB Graphic card: 128MB onboard

Bracket



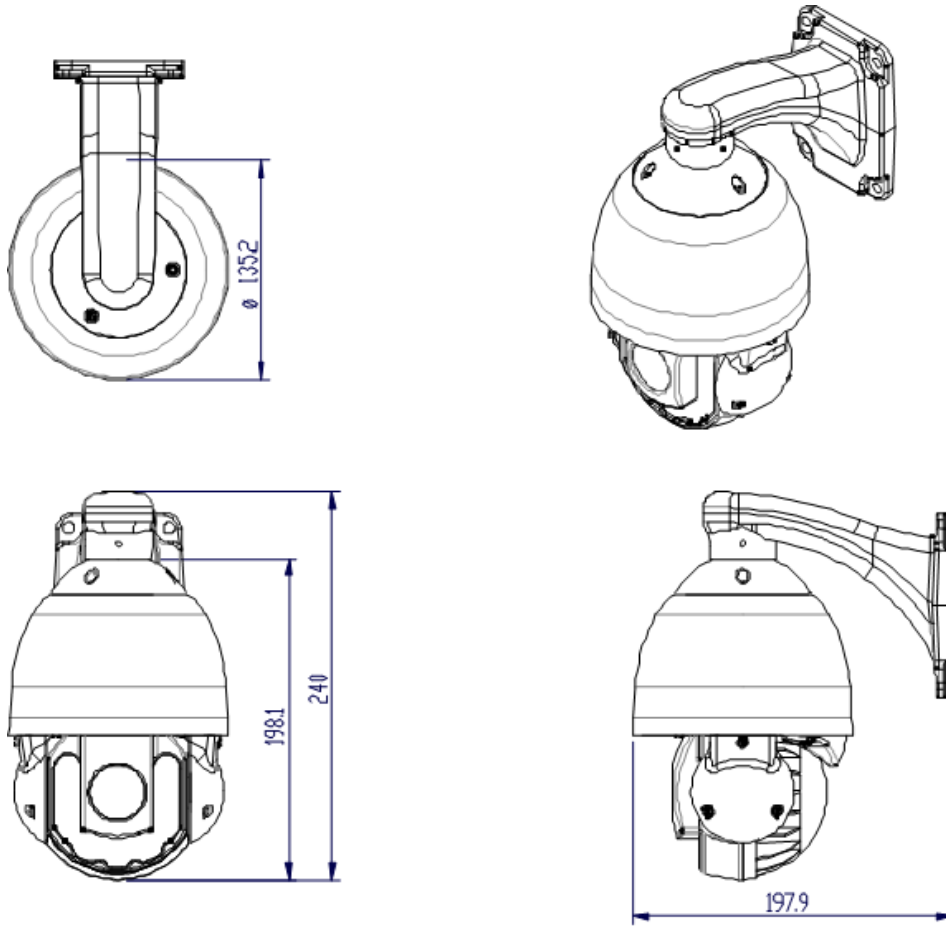

<p>Wall Mount Bracket</p>		
<p>Pendant Mount Bracket</p>		
<p>In-Ceiling Mount Bracket</p>		